


# SEALED LCD MONITOR

## *“Rough-and-Ready” for Harsh Environments*

- Low profile design makes it ideal for use in limited space
- Solid aluminum casing for durability
- Completely sealed chassis for improved reliability
- DC Power Conditioned Touchscreen Monitor ideal for use in vehicles
- Flush mount installation to dash or standard VESA mounting hardware
- Available in 12”, 15” (shown) or 17” models
- Use as main or remote display for equipment operation, cameras, operator interface, etc.

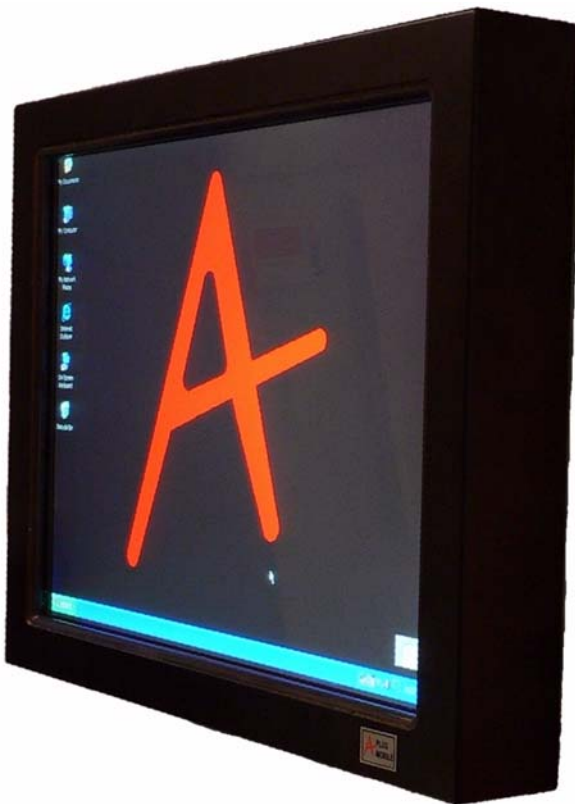

**MSRP = \$3,895.00 USD**

### **Features:**

- USB Acoustic Wave Touchscreen or Resistive Touchscreen Overlay
- Housed in a sealed, milled aluminum case
- Pure-glass touchscreens for superior image clarity, resolution, and light transmission
- Durable, scratch-resistant glass surface—continues to work if scratched (USB Acoustic Wave only)
- Stable "drift-free" operation—for touch response that's always accurate
- Finger, gloved hand, and soft stylus activation
- Industry Standard PC Connection
- Protected against an Internal Short Circuit, Over Voltage and Reverse Polarity
- IP68 anti-corrosion metal sealed connectors

### **Specifications:**

- Resolution 1024 x 768 XGA display
- Viewing Angle 140°(H) / 115°(V)
- Brightness 200 cd/m2
- Contrast Ratio 500:1
- Input Video Compatibility Analog RGB
- Temperature Range Operating 0°C to 40°C (Customize with internal heaters and/or coolers for use in extreme temperatures)
- Weight 14.8lbs.

### **Power Requirements:**

- Wide Range Input (10-30 VDC)

### **Dimensions:**

- Height 11.00" (27.9cm), Width 14.20" (36.1cm), Depth 1.925" (4.9cm)

APM-15MON Datasheet\_RevA\_02-09.fm



# APM-15MON

19629 S. McCord Rd.  
Oregon City, OR 97045  
[www.AplusMobile.com](http://www.AplusMobile.com)  
503.265.9325  
Sales@AplusMobile.com  
CAGE Code: 4P1Q1